MURR ELEKTRONIK
stay connected

UNIVERSAL CONTACTOR SUPPRESSOR

RC, 230VAC/DC/20VA/W


Art.No.: 20683
Weight: 0.013 kg
Country of origin: CZ
Model designation: RCF 22-470/230


230 V AC/DC
RC
For other configurations and voltages, please inquire.

[Link to Product]

Illustration



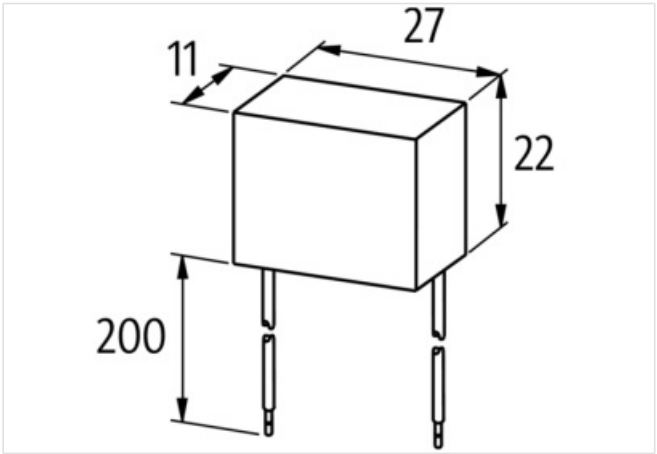

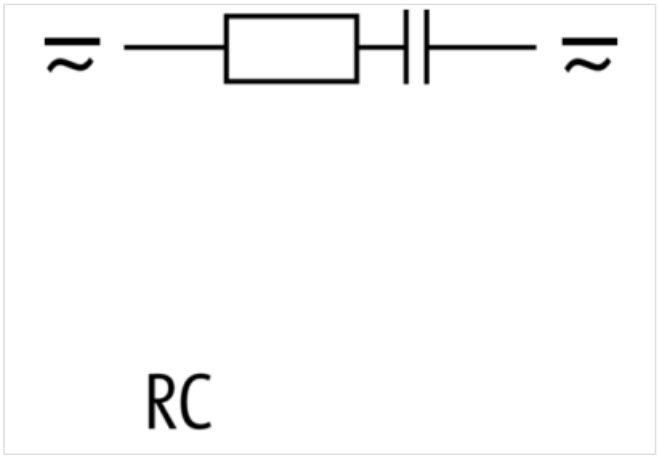

Product may differ from Image

Commercial data

URL Webshop	https://shop.murrelektronik.com/20683
GTIN	4048879020336
ECLASS-6.0	27371013
ECLASS-6.1	27371013

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30

MURR ELEKTRONIK
stay connected

ECLASS-7.0	27371013
ECLASS-7.1	27371013
ECLASS-8.0	27371013
ECLASS-8.1	27371013
ECLASS-9.0	27371013
ECLASS-9.1	27371013
ECLASS-10.0.1	27371013
ECLASS-10.1	27371013
ECLASS-11.0	27371013
ECLASS-11.1	27371013
ECLASS-12.0	27371013
ECLASS-13.0	27371013
ECLASS-14.0	27371013
ETIM-5.0	EC002498
ETIM-6.0	EC002498
ETIM-7.0	EC002498
ETIM-8.0	EC002498
customs tariff number	85363010
EAN	4048879020336
Packaging unit	1
Electrical data	
Damping factor	1.5× UN
Holding power max.	20 W
Electrical data | Input	
Input voltage AC min.	110 V
Input voltage AC max.	250 V
Input voltage DC min.	110 V
Input voltage DC max.	250 V
Installation | Connection	
Connection information	flexible connection wires
Device protection | Media	
Flame resistance	flame retardant
Mechanical data | Material data	
housing	Plastic
Combustibility class housing (UL94)	V-0
Mechanical data | Mounting data	
Height	22 mm
Width	27 mm
Depth	11 mm
Environmental characteristics | Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	70 °C

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30