MURR ELEKTRONIK
stay connected

## Modlight Illumix Classic Line 24W

LED machine lamp, IP67, 24VDC, M12 connection

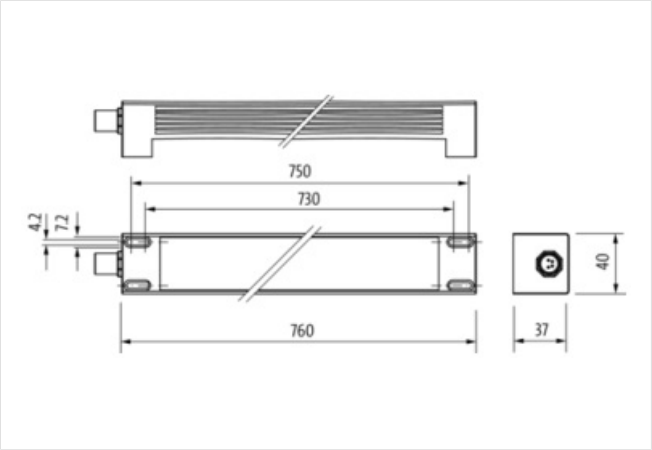
Art.No.: 4000-75801-1415024
Weight: 1.130 kg
Country of origin: DE
Model designation: Modlight Illumix Classic Line 24W

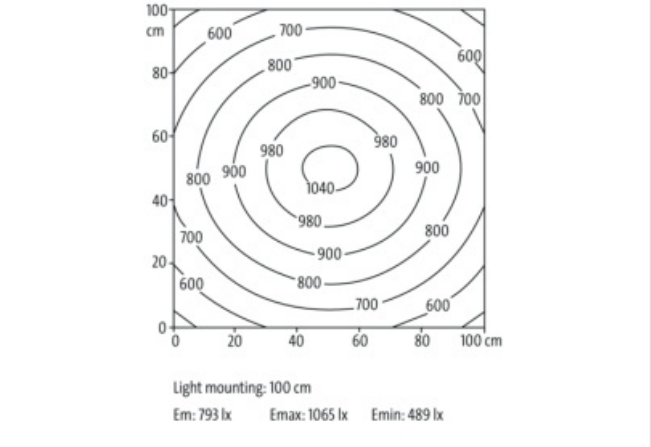
Modlight Illumix Classic Line
24 W

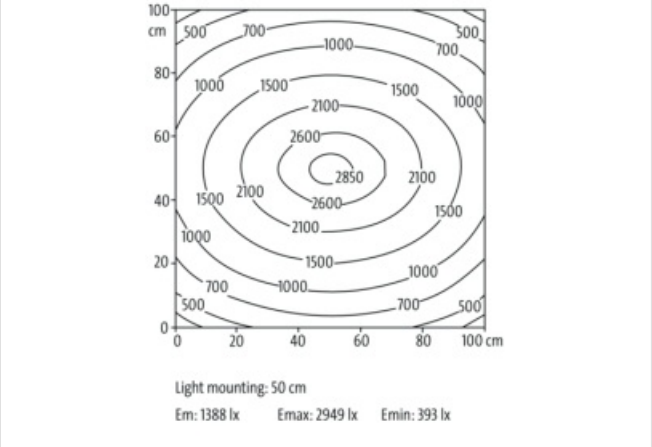
## Link to Product

### Illustration






Product may differ from Image

### Commercial data

| | |
|---|---|
| URL Webshop | https://shop.murrelektronik.com/4000-75801-1415024 |
| GTIN | 4048879670838 |
| Customs tariff number | 94054239 |
| ECLASS-6.0 | 27110306 |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30

MURR ELEKTRONIK
stay connected

| | |
|---|---|
| ECLASS-6.1 | 27110390 |
| ECLASS-7.0 | 27110390 |
| ECLASS-7.1 | 27110390 |
| ECLASS-8.0 | 27110390 |
| ECLASS-8.1 | 27110390 |
| ECLASS-9.0 | 27110345 |
| ECLASS-9.1 | 27110345 |
| ECLASS-10.0.1 | 27110345 |
| ECLASS-10.1 | 27110345 |
| ECLASS-11.0 | 27110345 |
| ECLASS-11.1 | 27110345 |
| ECLASS-12.0 | 27110345 |
| ECLASS-13.0 | 27110345 |
| ECLASS-14.0 | 27110345 |
| ETIM-5.0 | EC000348 |
| ETIM-6.0 | EC000348 |
| ETIM-7.0 | EC000348 |
| ETIM-8.0 | EC000348 |
| customs tariff number | 94054239 |
| EAN | 4048879670838 |
| Packaging unit | 1 |
| **Electrical data \| Supply** | |
| Operating voltage DC | 24 V |
| Operating voltage DC min. | 21,6 V |
| Operating voltage DC max. | 27,6 V |
| Power consumption max. | 24 W |
| **HMI \| Illumination properties** | |
| Radiation angle min. | 120 ° |
| Luminous temperature | 5.500 K |
| Color reproduction (Ra) min. | 80 |
| Luminous efficacy | 157 lm/W |
| Light color | daylight white |
| Luminous flux | 3.768 lm |
| **Installation \| Connection** | |
| Family construction form | M12 |
| Gender | male |
| **Installation \| Pin assignment** | |
| Coding | A |
| No. of poles | 4 |
| **Device protection \| Electrical** | |
| Installation height max. ASL | 2.000 m |
| Degree of protection (EN IEC 60529) | IP67 |
| **Device protection \| Mechanical** | |
| Shock resistance (EN IEC 60068-2-27) | 50 g 11 ms |
| Vibration resistance (EN IEC 60068-2-6) | 10 mm (2 ... 9 Hz), 3 g (9 ... 200 Hz) |
| **Mechanical data \| Material data** | |
| housing | Aluminum |
| Coating housing | anodized |
| Material light cover | diffuse single-pane safety glass (ESG) |
| Thickness material light cover | 4 mm |
| **Mechanical data \| Mounting data** | |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30

| | |
|---|---|
| Height | 37 mm |
| Width | 760 mm |
| Depth | 40 mm |
| Screw head diameter max. | 12 mm |
| Screw head thread max. | M5 |
| **Environmental characteristics \| Climatic** | |
| Operating temperature min. | -30 °C |
| Operating temperature max. | 50 °C |
| Relative humidity (operation) | 5 % … 95 % |
| **Connection type 1** | |
| Family construction form | M8 |
| No. of poles | 4 |
| Coding | A |
| Gender | male |
| PIN 1 | n.c. |
| PIN 2 | n.c. |
| PIN 3 | 0 V DC |
| PIN 4 | 24 V DC |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30