MURR ELEKTRONIK
stay connected

Reset button with 2 push buttons

Every 1 NO contact in a IP65 enclosure


Art.No.: 69011
Weight: 0.110 kg
Country of origin: DE
Model designation: R-Button 42 2NO M12(4)


R-Button / 42 2NO M12(4)
with M12 connection
4-pole
2 buttons (each 1 NO contact)
Delivery contents:
Flat lens, transparent clear, red, yellow, green, blue
Label plates, O, I, R, ↑,↓
mounting with clip on the back side


Link to Product

Illustration



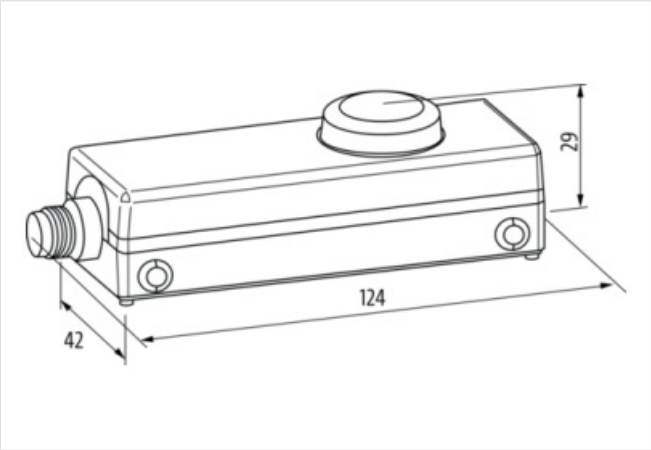

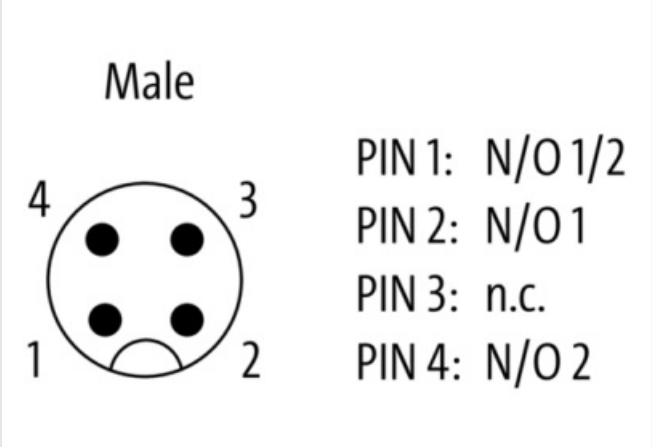

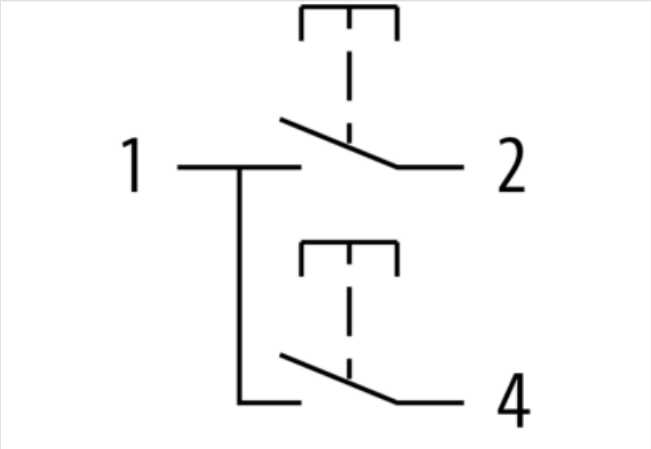

Product may differ from Image

Commercial data

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30

MURR ELEKTRONIK
stay connected

URL Webshop	https://shop.murrelektronik.com/69011
GTIN	4048879594318
Customs tariff number	85365080
ECLASS-6.0	27371228
ECLASS-6.1	27371228
ECLASS-7.0	27371228
ECLASS-7.1	27371228
ECLASS-8.0	27371228
ECLASS-8.1	27371228
ECLASS-9.0	27371228
ECLASS-9.1	27371228
ECLASS-10.0.1	27371228
ECLASS-10.1	27371228
ECLASS-11.0	27371228
ECLASS-11.1	27371228
ECLASS-12.0	27371228
ECLASS-13.0	27371228
ECLASS-14.0	27371228
ETIM-5.0	EC000225
ETIM-6.0	EC000225
ETIM-7.0	EC000225
ETIM-8.0	EC000225
customs tariff number	85365080
EAN	4048879594318
Packaging unit	1
Electrical data | Output	
Switching current (AC-15)	15 A
Switching current (DC-13)	2,2 A
Utilization category AC-15 (EN IEC 60947-5-1)	1.5 A @ 240 V
Utilization category DC-13 (EN IEC 60947-5-1)	2 A @ 24 V
Device protection	
Condition lifetime	load-dependent, temperature dependent
Device protection | Electrical	
Degree of protection (EN IEC 60529)	IP65
Electrical lifetime	0 cycles
Device protection | Mechanical	
Mechanical endurance	0 cycles
Mechanical data	
Bounce time max.	10 ms
Mechanical data | Material data	
Material contact	AgNi
Mechanical data | Mounting data	
Height	29 mm
Width	124 mm
Depth	42 mm
Environmental characteristics | Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	70 °C
Ambient temperature (storage, transport)	-25 °C … 85 °C
Connection type 1	

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30

Family construction form	M12
No. of poles	4
Coding	A
Gender	male
Color contact carrier	black
PIN 1	NO 1 2
PIN 2	NO 1
PIN 4	NO 2

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30

Murrelektronik GmbH | Grabenstraße 29 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com