MURR ELEKTRONIK
stay connected

Emergency-stop pushbutton with 2 positive opening contacts

in a IP65 enclosure


Art.No.: 69040
Weight: 0.193 kg
Country of origin: DE
Model designation: E-Stop 72P 2NC M12(4)


E-Stop 72P 2NC M12(4)
with M12 connection
4-pole
Emergency-Stop button
2 NC (positively-opening)
with protection shroud


Link to Product

Illustration



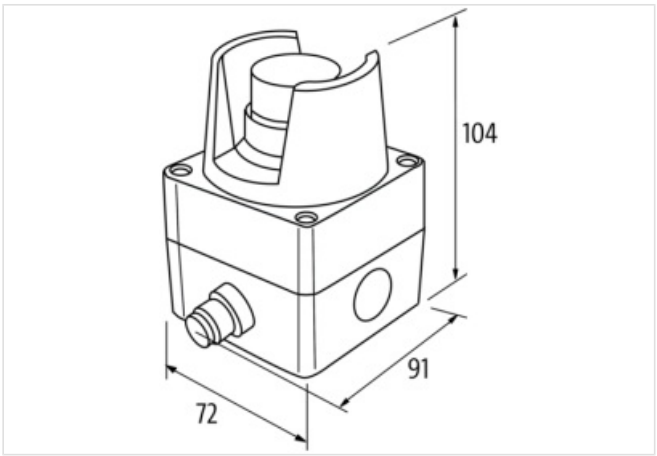

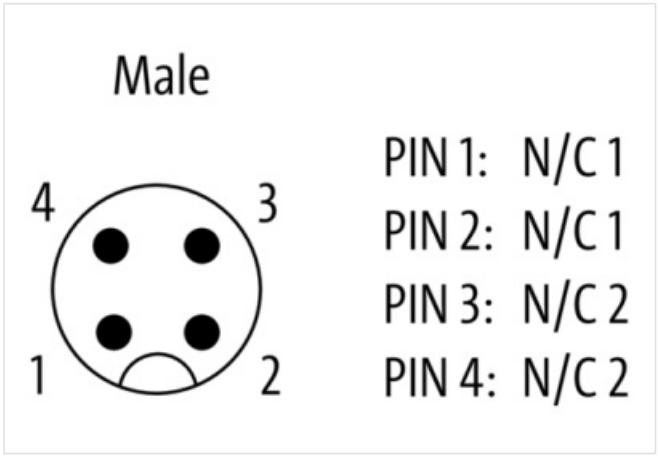

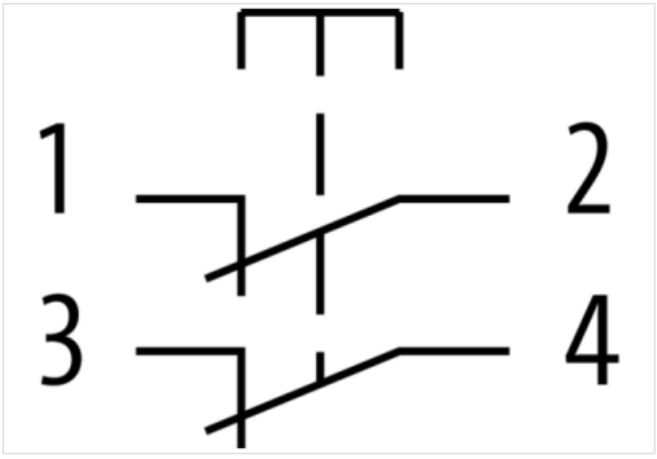

Product may differ from Image

Commercial data

URL Webshop	https://shop.murrelektronik.com/69040

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30

MURR ELEKTRONIK
stay connected

GTIN	4048879594806
Customs tariff number	85365080
ECLASS-6.0	27371244
ECLASS-6.1	27371244
ECLASS-7.0	27371244
ECLASS-7.1	27371244
ECLASS-8.0	27371244
ECLASS-8.1	27371244
ECLASS-9.0	27371244
ECLASS-9.1	27371244
ECLASS-10.0.1	27371244
ECLASS-10.1	27371244
ECLASS-11.0	27371244
ECLASS-11.1	27371244
ECLASS-12.0	27371244
ECLASS-13.0	27371244
ECLASS-14.0	27371244
ETIM-5.0	EC002034
ETIM-6.0	EC002034
ETIM-7.0	EC002034
ETIM-8.0	EC002034
customs tariff number	85365080
EAN	4048879594806
Packaging unit	1
Electrical data | Output	
Switching current (AC-15)	30 A
Switching current (DC-13)	2,2 A
Utilization category AC-15 (EN IEC 60947-5-1)	3 A @ 250 V
Utilization category DC-13 (EN IEC 60947-5-1)	2 A @ 24 V
Device protection	
Condition lifetime	load-dependent, temperature dependent
Device protection | Electrical	
Degree of protection (EN IEC 60529)	IP65
Electrical lifetime	0 cycles
Device protection | Mechanical	
Mechanical endurance	0 cycles
Operating life B10d	250.000 cycles
Mechanical data	
Bounce time max.	9 ms
Mechanical data | Material data	
Material contact	AgNi
Mechanical data | Mounting data	
Height	104 mm
Width	72 mm
Depth	91 mm
Mounting method	screwed
Environmental characteristics | Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	60 °C
Ambient temperature (storage, transport)	-25 °C … 85 °C
Technical Data | Reliability	

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30

Lambda normally closed contact	20 %
Connection type 1	
Family construction form	M12
No. of poles	4
Coding	A
Gender	male
Color contact carrier	black
PIN 1	NC 1
PIN 2	NC 1
PIN 3	NC 2
PIN 4	NC 2

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30