MURR ELEKTRONIK
stay connected

**Illuminated Emergency-stop pushbutton with 2 positive opening contacts**

in a IP65 enclosure

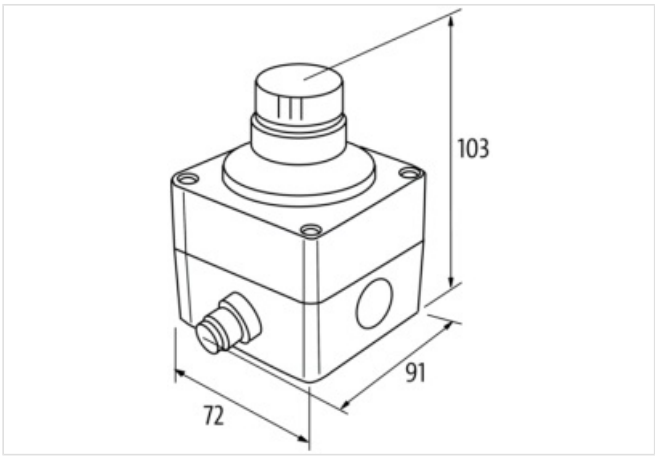
Art.No.: 69043
Weight: 0.195 kg
Country of origin: DE
Model designation: E-Stop 72 2NC L M12(8)

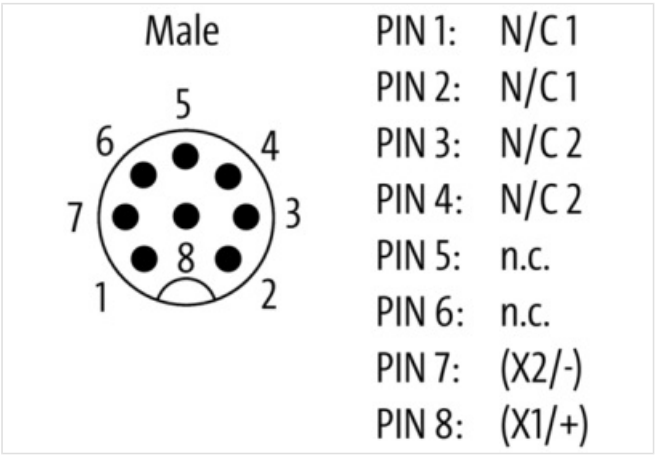
E-Stop 72 2NC L M12(8)
with M12 connection
8-pole
Emergency-Stop button
2 NC (positively-opening)
LED-Ring can be lit

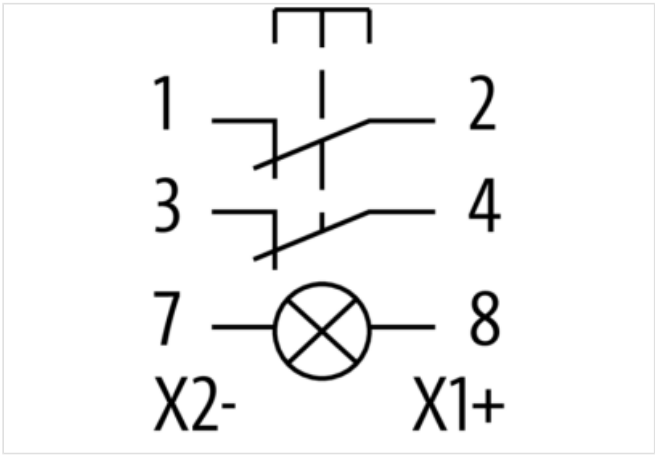
## Link to Product

### Illustration






Product may differ from Image

### Commercial data

| | |
|---|---|
| URL Webshop | https://shop.murrelektronik.com/69043 |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30

MURR ELEKTRONIK
stay connected

| | |
|---|---|
| GTIN | 4048879594813 |
| Customs tariff number | 85365080 |
| ECLASS-6.0 | 27371244 |
| ECLASS-6.1 | 27371244 |
| ECLASS-7.0 | 27371244 |
| ECLASS-7.1 | 27371244 |
| ECLASS-8.0 | 27371244 |
| ECLASS-8.1 | 27371244 |
| ECLASS-9.0 | 27371244 |
| ECLASS-9.1 | 27371244 |
| ECLASS-10.0.1 | 27371244 |
| ECLASS-10.1 | 27371244 |
| ECLASS-11.0 | 27371244 |
| ECLASS-11.1 | 27371244 |
| ECLASS-12.0 | 27371244 |
| ECLASS-13.0 | 27371244 |
| ECLASS-14.0 | 27371244 |
| ETIM-5.0 | EC002034 |
| ETIM-6.0 | EC002034 |
| ETIM-7.0 | EC002034 |
| ETIM-8.0 | EC002034 |
| customs tariff number | 85365080 |
| EAN | 4048879594813 |
| Packaging unit | 1 |
| **Electrical data** | |
| Operating voltage AC/DC LED illumination min. | 12 V |
| Operating voltage AC/DC LED illumination max. | 30 V |
| Operating current LED illumination | 15 mA @ 24 V AC/DC |
| **Electrical data \| Output** | |
| Switching current (AC-15) | 30 A |
| Switching current (DC-13) | 2,2 A |
| Utilization category AC-15 (EN IEC 60947-5-1) | 3 A @ 250 V |
| Utilization category DC-13 (EN IEC 60947-5-1) | 2 A @ 24 V |
| **Device protection** | |
| Condition lifetime | load-dependent, temperature dependent |
| **Device protection \| Electrical** | |
| Degree of protection (EN IEC 60529) | IP65 |
| Electrical lifetime | 0 cycles |
| **Device protection \| Mechanical** | |
| Mechanical endurance | 0 cycles |
| Operating life B10d | 250.000 cycles |
| **Mechanical data** | |
| Bounce time max. | 9 ms |
| **Mechanical data \| Material data** | |
| Material contact | AgNi |
| **Mechanical data \| Mounting data** | |
| Height | 103 mm |
| Width | 72 mm |
| Depth | 91 mm |
| Mounting method | screwed |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30

| | |
|---|---|
| **Environmental characteristics \| Climatic** | |
| Operating temperature min. | -25 °C |
| Operating temperature max. | 60 °C |
| Ambient temperature (storage, transport) | -25 °C … 85 °C |
| **Technical Data \| Reliability** | |
| Lambda normally closed contact | 20 % |
| **Connection type 1** | |
| Family construction form | M12 |
| No. of poles | 8 |
| Coding | A |
| Gender | male |
| Color contact carrier | black |
| PIN 1 | NC 1 |
| PIN 2 | NC 1 |
| PIN 3 | NC 2 |
| PIN 4 | NC 2 |
| PIN 7 | X 2 - |
| PIN 8 | X 1 + |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30