MURR ELEKTRONIK
stay connected

E-Stop 30 2NC M12(4)

Emergency-Stop


Art.No.: 69100
Weight: 0.043 kg
Country of origin: HU
Model designation: E-Stop 30 2NC M12(4)

E-Stop 30 2NC M12(4)
Emergency-Stop
Mounting hole 30,3 mm
Connection M12 (4-pin)

Link to Product

Illustration



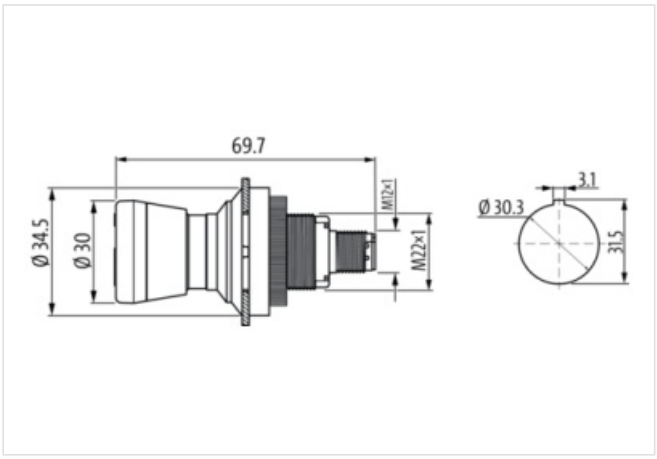

Product may differ from Image

Commercial data

URL Webshop	https://shop.murrelektronik.com/69100
GTIN	4065909019306
Customs tariff number	85365080
ECLASS-6.1	27371244
ECLASS-7.0	27371244
ECLASS-7.1	27371244
ECLASS-8.0	27371244
ECLASS-8.1	27371244
ECLASS-9.0	27371244
ECLASS-9.1	27371244
ECLASS-10.0.1	27371244
ECLASS-10.1	27371244
ECLASS-11.0	27371244
ECLASS-11.1	27371244
ECLASS-12.0	27371244
ECLASS-13.0	27371244
ECLASS-14.0	27371244
ETIM-5.0	EC002034

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30

MURR ELEKTRONIK
stay connected

ETIM-6.0	EC002034
ETIM-7.0	EC002034
ETIM-8.0	EC002034
customs tariff number	85365080
EAN	4065909019306
Packaging unit	1
Electrical data | Supply	
Rated operating voltage AC-15	35 V
Rated operating voltage DC-13	35 V
Electrical data | Input	
Short-circuit current	1.000 A
Electrical data | Output	
Voltage switching AC min.	1 V
Switching voltage AC max.	35 V
Voltage switching DC min.	1 V
Switching voltage DC max.	35 V
Switching voltage AC max. (UL 60947)	30 V
Switching voltage DC max. (UL 60947)	30 V
Switching current min.	1 mA
Switching current max.	100 mA
Switching power max.	0,25 W
Installation | Connection	
Family construction form	M12
Installation | Pin assignment	
Coding	A
No. of poles	4
Device protection | Electrical	
Installation height max. ASL	2.000 m
Degree of protection front (EN IEC 60529)	IP65
Degree of protection back (EN IEC 60529)	IP67, IP65
Pollution Degree	2
Short circuit protective device (SCPD)	fuse 250 V / 0.1 A / 1.5 kA gG quick
Overvoltage category (EN 60950-1)	II
Rated insulation voltage	250 V
Device protection | Mechanical	
Mechanical endurance	0 cycles
Mechanical endurance B10	0 cycles
Operating life B10d	0 cycles
UL enclosure type rating front side	type 4X
Device protection | Media	
Salt-spray resistance (IEC 60068-2-11)	Yes
Mechanical data	
Shape collar	round
Color collar	yellow
Actuating function	latching
Contact type	2 NC
Color	red
Can be illuminated	No
Mechanical data | Material data	
housing	Plastic

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30

Material contact	Gold
Mechanical data | Mounting data	
Height	30 mm
Width	34,5 mm
Depth	69,7 mm
Mounting method	Threaded ring
Installation height	33,4 mm
Mounting depth	36,4 mm
Mounting hole	30,3 mm
Grid min.	35 mm
Environmental characteristics | Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	85 °C
Derating	40 °C
Ambient temperature (storage, transport)	-40 °C … 90 °C
Relative humidity (operation)	93 %
Connection type 1	
Family construction form	M12
No. of poles	4
Coding	A
Gender	male
Color contact carrier	black
PIN 1	NC 1
PIN 2	NC 1
PIN 3	NC 2
PIN 4	NC 2

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30